


1000 - 2000
REFER OCCUPANCY
GUIDE PAGE 82 OF
THE OPUS TECHNICAL
MANUAL DRAWING
OB 100/24

MM

MM

OPUS ORDER FORM FOR FACE FIX NON-CONCEALED FIXINGS TIMBER/STEEL	
CUSTOMER NAME:	
CUSTOMER ORDER NUMBER:	
NUMBER OF POSTS REQUIRED:	
THICKNESS OF GLASS BEING USED REFER OPUS DRAWING OB100/4 FOR OCCUPANCY TYPE.	10-12-15-16
HEIGHT FROM FLOOR TO TOP OF GLASS REFER OPUS DRAWING OB100/4 FOR OCCUPANCY TYPE - (SEE A ON DRAWING)	MM
STAINLESS STEEL TOP CAP FINISH - MIRROR POLISH	YES/NO
STAINLESS STEEL TOP CAP FINISH - SATIN (BRUSHED)	YES/NO
STAINLESS STEEL TOP CAP FINISH POWDERCOATED TO MATCH POST	YES/NO
POWDERCOAT FINISH.	YES/NO
COLOUR REQUIRED:	
FIX KIT #4 REQUIRED:	YES/NO
CONTENTS OF OPTIONAL FIXING KIT #4	
STAINLESS STEEL M12 DOME NUTS - 2NO	
STAINLESS STEEL SPRING WASHERS M12 - 2NO	
STAINLESS STEEL FLAT WASHERS M12 X 24MM - 2NO	
NYLON TOP HAT INSERTS M12 X 24MM - 2NO	
NYLON TOP HAT INSERTS M12 X 32MM - 2NO	
STAINLESS STEEL WASHERS M12 50MM X 50MM - 4NO	
STAINLESS STEEL M12 NUTS - 2NO	
STAINLESS STEEL STUD M12 X 200MM - 2NO (B ON DWG)	

© OPUS MANUFACTURING LTD 2012

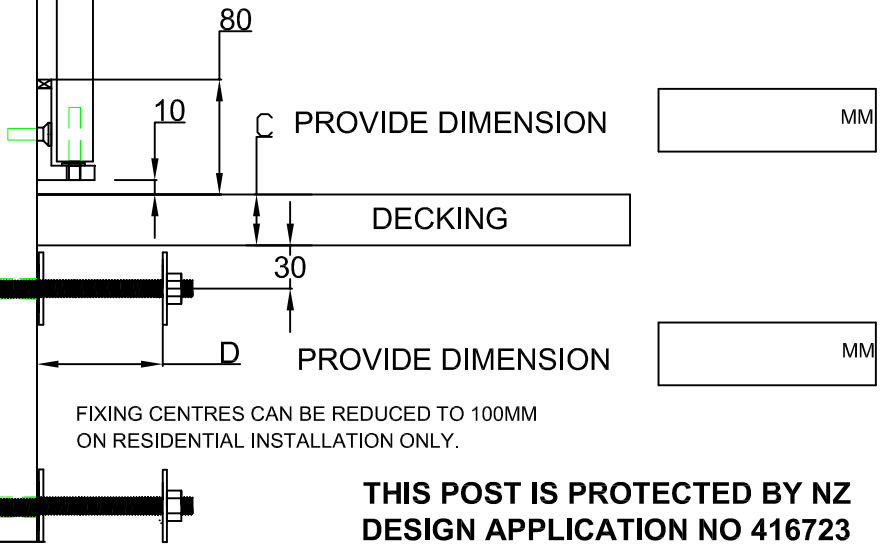

**THIS POST IS PROTECTED BY NZ
DESIGN APPLICATION NO 416723**

TIMBER/STEEL BY OTHERS

DRAWING UPDATED 31/05/19 TO SHOW MAX 2MTR HEIGHT

OPUS™ MANUFACTURING LTD.
11 Grasslands Place
P.O.Box 5750 Frankton, Hamilton, New Zealand
Telephone: +64 7 847 5001
Fax: +64 7 847 5003

**ORDER FORM FOR OPUS MANUFACTURING
FACE FIX BALUSTRADE SYSTEM OB101 NON-
CONCEALED FOR INSTALLATION ON TIMBER**

OPUS PART NUMBER OB101

DRAWING NUMBER: OB101/10