



OPUS ORDER FORM FOR FACE FIX NON-CONCEALED SPAX FIXINGS TIMBER	
CUSTOMER NAME:	
CUSTOMER ORDER NUMBER:	
NUMBER OF POSTS REQUIRED:	
THICKNESS OF GLASS BEING USED REFER OPUS DRAWING OB100/4 FOR OCCUPANCY TYPE.	10-12
HEIGHT FROM FLOOR TO TOP OF GLASS REFER OPUS DRAWING OB100/4 FOR OCCUPANCY TYPE - (SEE A ON DRAWING)	MM
STAINLESS STEEL TOP CAP FINISH - MIRROR POLISH	YES/NO
STAINLESS STEEL TOP CAP FINISH - SATIN (BRUSHED)	YES/NO
STAINLESS STEEL TOP CAP FINISH POWDERCOATED TO MATCH POST	YES/NO
POWDERCOAT FINISH.	YES/NO
COLOUR REQUIRED:	
FIX KIT #? REQUIRED:	YES/NO
CONTENTS OF OPTIONAL FIXING KIT #?	
6NO - 8MM x 180MM STAINLESS STEEL SPAX FITTINGS	

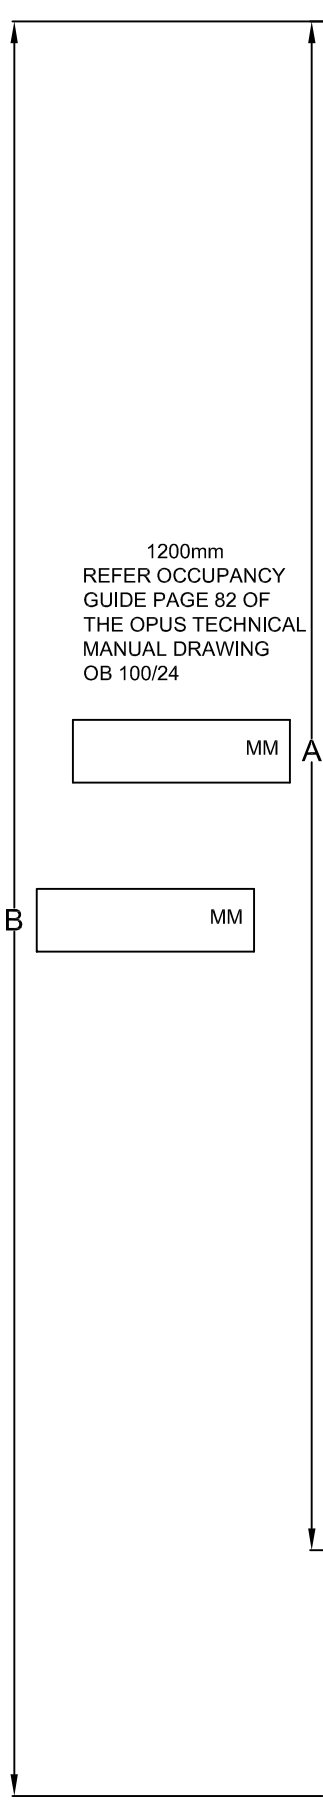

© OPUS MANUFACTURING LTD 2012

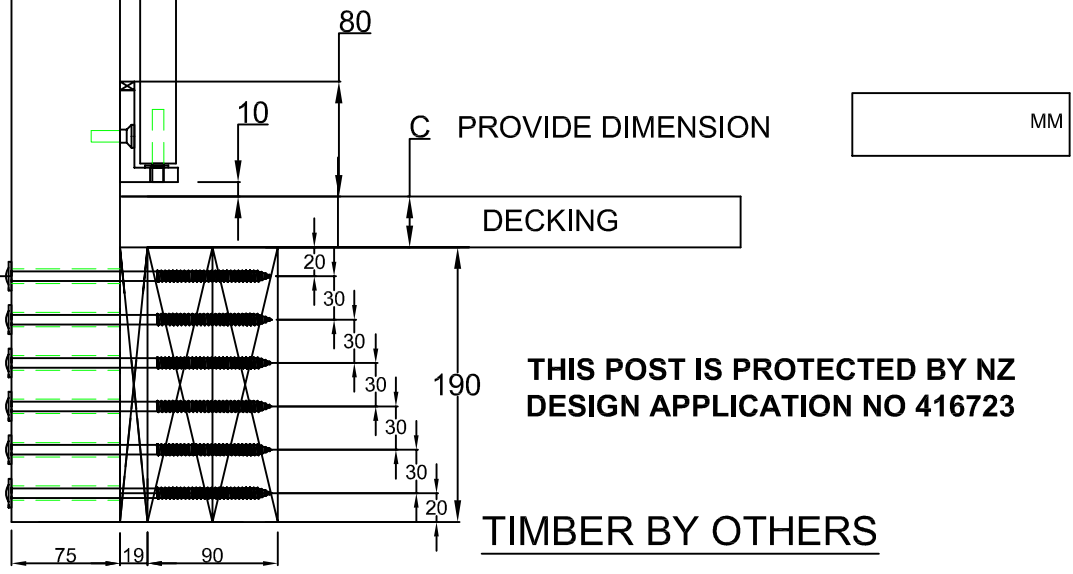

DRAWING UPDATED 31/05/19 TO SHOW MAX 2MTR HIGHT

OPUS™ MANUFACTURING LTD.
11 Grasslands Place
P.O.Box 5750 Frankton, Hamilton, New Zealand
Telephone: +64 7 847 5001
Fax: +64 7 847 5003

**ORDER FORM FOR OPUS MANUFACTURING
FACE FIX BALUSTRADE SYSTEM WITH SPAX
FIXINGS OB101-S NON- CONCEALED FOR
INSTALLATION ON TIMBER**

OPUS PART NUMBER OB101-S DRAWING NUMBER: OB101/10A